

## MDT DALI Control 64 Gateway, MDRC

Version		
SCN-DA641.04	DALI Control 64 Gateway	4SU MDRC, 64 ECGs/16 DALI groups
SCN-DA642.04	DALI Control 2 x 64 Gateway	4SU MDRC, 2 x 64 ECGs/16 DALI groups (2 DALI outputs)

The MDT DALI Control Gateway is the interface between DALI lights and the KNX installation and offers many new possibilities, such as the light control in the HSV colour space.

The MDT DALI Control Gateway allows the individual control of up to 64 ECGs/16 DALI groups. (SCN-DAL642.04 > 2 x 64 ECGs/16 DALI groups, 2 DALI outputs).

For each group the functions switching, dimming and brightness value are available. The DALI Control Gateway supports various colour control modes (according to DALI DT8 standard) such as HSV colour space, RGB / RGBW, XY colour and the colour control mode Tunable White. With the integrated colour control module 16 individual time-dependent lighting moods with up to 300 control commands can be created. The scene control allows to assign all 16 groups (SCN-DALI32.03 > 32 groups) to the 16 possible scenes as desired with individual dimming times.

The MDT DALI Control Gateway provides the operating modes normal operation, continuous operation, night operation, staircase operation and panic operation. The individual light groups can be switched between 1-8 and 9-16 using the buttons for manual operation. Faulty ECGs can be detected individually or at group level. In the event of a fault, a simple quick exchange of the affected ECG is possible.

The free DCA app is used for the commissioning of the DALI bus system, the configuration of the scenes and the time-dependent lighting moods.

The MDT DALI Control Gateway is a modular installation device for fixed installation in dry rooms. It fits on 35mm rails in power distribution boards or closed compact boxes.

For project design and commissioning of the MDT DALI Control Gateway it is recommended to use the ETS. Please download the application software at [www.mdt.de/Downloads.html](http://www.mdt.de/Downloads.html)

SCN-DA641.04




SCN-DA642.04



- Production in Germany certified according to ISO 9001
- Individual control of up to 64 ECGs/16 DALI groups (SCN-DAL642.04 > 2 x 64 ECGs/16 DALI groups, 2 DALI outputs)
- Supports DALI and DALI-2 standard, as well as DALI DT6/DT8 ECG
- **Innovative HSV colour control, RGB, RGBW and XY colour according to DALI DT8 standard**
- **Tunable White, colour temperature control**
- **Integrated colour control module for time dependent controlling of the luminous colour** in up to 300 steps
- Operation modes like normal operation, continuous operation, night operation, stairwell and panic operation, Manual operation
- 16 scenes with individual dimming times
- **Energy saving function for switching off the ECGs** in the DALI groups (via additional KNX switch actuator)
- Fault detection of lamp faults and faulty ECGs
- Quick exchange of ECG
- **Free DCA app for commissioning** the DALI bus system and configuration of the scenes and time control
- Commissioning with ETS5. 3 years warranty

Technical Data	SCN-DA641.04	SCN-DA642.04
<b>Outputs</b>		
Number of groups	16	2 x 16
Number of ECG	64	2 x 64
Maximum Dali voltage (typical)	16VDC	16VDC
Maximum Dali current	250mA	250mA
<b>Specification KNX Interface</b>	TP-256 with Long Frame support for ETS5	TP-256 with Long Frame support for ETS5
<b>Available application software</b>	ETS5	ETS5
<b>Permitted wire gauge</b>		
Screw terminal (max. 0,5Nm tightening torque)	0,5 - 4,0mm <sup>2</sup> solid core 0,5 - 2,5mm <sup>2</sup> finely stranded	0,5 - 4,0mm <sup>2</sup> solid core 0,5 - 2,5mm <sup>2</sup> finely stranded
KNX busconnection terminal	0,8mm Ø, solid core	0,8mm Ø, solid core
<b>Power Supply</b>	230VAC/50Hz	230VAC/50Hz
<b>Power consumption mains 230VAC typ.</b>	< 5W	< 5W
<b>Operation temperature range</b>	0 bis + 45°C	0 bis + 45°C
<b>Enclosure</b>	IP 20	IP 20
<b>Dimensions MDRC (Space Units)</b>	4SU	4SU

**Exemplary circuit diagram SCN-DA641.04**

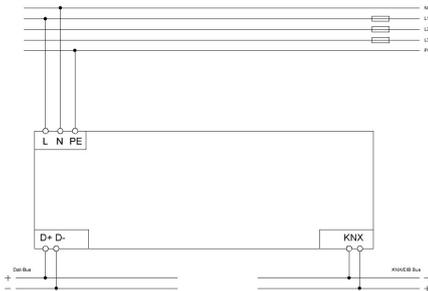

**Exemplary circuit diagram SCN-DA642.04**

